

Family: 120V Series Spot Light | Item No. 56000 BZ

▼ start here



1

1. Find a clear area in which you can work.
2. Carefully review instructions prior to assembly.
3. Gather tools required: **WIRE STRIPPERS, HEX DRIVER, THREAD SEALANT.**
  - Save these instructions for future reference.

**WARNING: LUMINAIRE MUST BE INSTALLED AND GROUNDED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE (NEC) AND LOCAL CODES. FOR PORTABLE STAKE OR SUFACE MOUNT USING A CORD AND PLUG, THE LUMINAIRE MUST BE PLUGGED INTO A RECEPTACLE PROTECTED BY A GROUND FAULT CIRCUIT INTERRUPTER (GFI). FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY AND / OR DAMAGE TO THE LUMINAIRE.**

**ALWAYS USE UL RECOGNIZED WIRE CONNECTORS FOR CONNECTIONS.**

**SAFETY WARNING: LUMINAIRE CAN BECOME VERY HOT DEPENDING ON THE LAMP WATTAGE USED. LENS AND HOUSING AROUND THE LAMP CAN BECOME HOT ENOUGH TO BLISTER HANDS. PARTICULAR CARE SHOULD BE TAKEN NOT TO LOCATE LUMINAIRES WHERE SMALL CHILDREN CAN REACH THEM IF HIGH WATTAGE LAMPS ARE USED.**

**IN GROUND LUMINAIRE IS ETL LISTED FOR ABOVE GRADE INSTALLATION ONLY.**

2

1. Please refer to the **assembly and mounting instructions** located on the back of this sheet to continue installation of this fixture.

3

## lamp installation | replacement

1. To prevent electrical shock, disconnect from the electrical supply before servicing.
2. Loosen set screw from shade assembly.
3. Remove shade assembly to expose lamp.
4. Replace lamp with correct wattage and type marked on fixture label.  
CAUTION: DO NOT EXCEED MAXIMUM WATTAGE MARKED ON LUMINAIRE LABEL.
5. Re-install shade assembly and tighten set screw.
6. After lamp is installed supply power to the luminaire and check for proper operation.

**MAINTENANCE NOTE: TO ASSURE PROPER OPERATION AND EFFICIENCY AND TO PREVENT LUMINAIRE OVERHEATING, LENS MUST BE KEPT CLEAN AND FREE OF DIRT, LEAVES, TRASH, AND MINERAL DEPOSITS FROM WATER. A REGULAR SCHEDULE MAINTENANCES RECOMMENDED.**


Info 56000 BZ: Lamp Type is A 19 incandescent, Maximum Wattage is 75 watts per bulb.



# mounting instructions

Family: 120V Series Spot Light | Item No. 56000 BZ

## Drawing 1 - Fixture Mounting

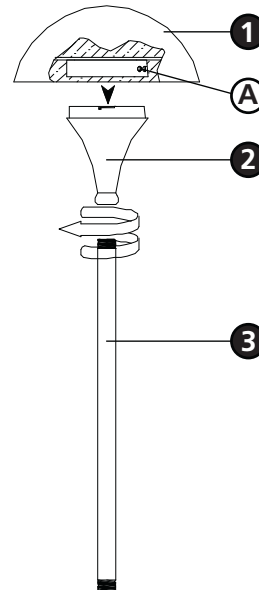

1

1. Attach shade assembly (1) by pushing down and turning it clockwise unto the socket holder (2).

2. Locate the securement screw (A) attached to the shade assembly (1). When Step 1 is complete proceed to tighten screw (A) with the correct size hex driver.

3. Now proceed to assemble mounting tube (3) with 12 NPT threaded ends. Push the white, black and green luminaire electrical wires through the mounting tube (3) sliding the tube in an upward direction, when that is complete proceed to thread into the bottom of the socket holder (2) being careful not to cut any of the wires.

2

1. Make sure electrical supply is off at the circuit breaker before starting luminaire installation or servicing.

2. Thread luminaire onto junction box or other mounting device until it is at desired direction using thread sealant.

3. Attach luminaire leads to line in leads observing polarity, black to black, white to white and green to ground using silicone filled safety connectors provided.

4. Attach junction box cover with luminaire to junction box (by others).

Note: Make sure not to pinch wires that may be sandwiched between cover and box.

5. Coat exposed luminaire threads with thread sealant to keep moisture from entering junction box or other mounting device.

6. Please refer to front of this sheet to install lamp.



### **WARNING: TO REDUCE THE RISK OF FIRE, OR INJURY TO PERSONS:**

1. Turn off/unplug and allow to cool before replacing lamp.

2. Lamps get hot quickly! Contact only switch/plug when turning on.

3. Do not touch hot lens, guard or enclosure.

4. Keep lamp away from material that may burn.

5. Do not operate luminaire fitting with a missing or damaged cover.