



KALCO
Handcrafted Since 1980

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 5756

NEWPORT 2LT 23 INCH FLUORESCENT FLUSH MOUNT

I M A G E



If you have any questions or problems assembling your fixture please call us for assistance.

Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

WARNING! TO REDUCE THE RISK OF FIRE OR INJURY PLEASE TAKE PRECAUTION AND FOLLOW THE STEPS BELOW.

1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install fixture, make sure you have enough qualified help.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

Si vous avez des questions ou des problèmes assemblage de votre dispositif s'il vous plait appel pour l'assistance.


Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

AVERTISSEMENT! POUR RÉDUIRE LES RISQUES D'INCENDIE OU DE BLESSURES S'IL VOUS PLAÎT PRENDRE DES PRÉCAUTIONS ET SUIVEZ LES ÉTAPES CI-DESSOUS.

1. Si vous n'êtes pas familier avec le câblage électrique, appelez un électricien qualifié pour installer cet appareil. Plus d'une personne peut être nécessaire d'installer appareil, assurez vous que vous disposez de l'aide assez qualifié.
2. Coupez l'alimentation au circuit de l'appareil sur le tableau de service. Utiliser un détecteur de tension pour vérifier que l'alimentation est coupée
3. NE PAS installer l'ampoule qui excède la puissance maximale indiquée sur l'étiquette du socket.

WIRING DIAGRAM

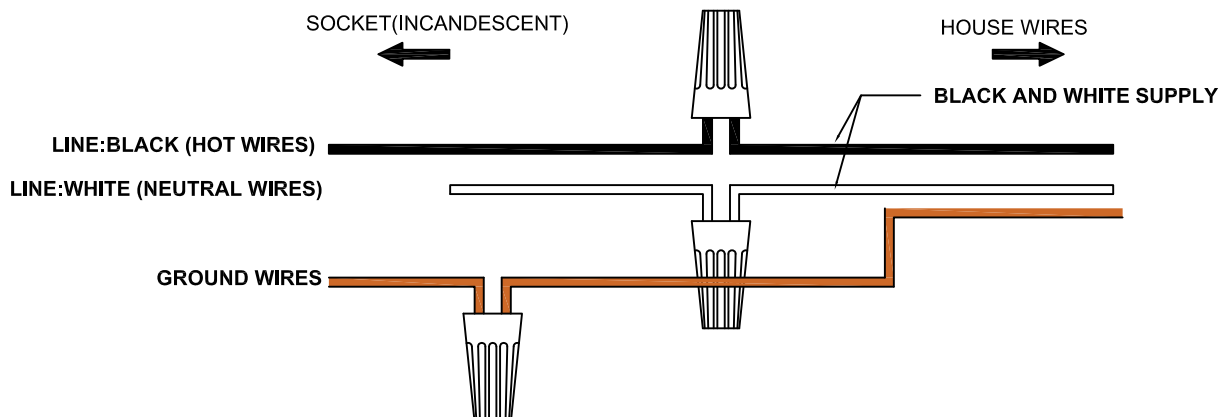



KALCO
Handcrafted Since 1980



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 5756

NEWPORT 2LT 23 INCH FLUORESCENT FLUSH MOUNT

MOUNTING/ELECTRICAL INSTRUCTIONS

- STEP 1:** Fasten cross bar to outlet box with (2) 8-32 x 3/4" screws.
- STEP 2:** Assemble nipple to cross bar.
- STEP 3:** Mount the canopy to the cross bar. Lock in place using rs cap.
- STEP 4:** Refer to wiring diagram. With wire carefully threaded thru back plate, connect the black supply wire to the black fixture wire with wire connector, connect the white supply wire to the white fixture wire with wire connector. Connect bare ground wire from the outlet box (if supplied) with connectors.
- STEP 5:** Carefully tuck in all wires and raise the canopy to the outlet box. Secure canopy with ball nut screw.

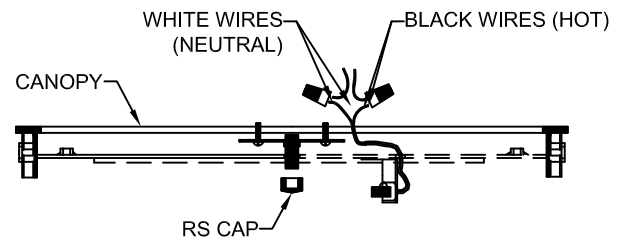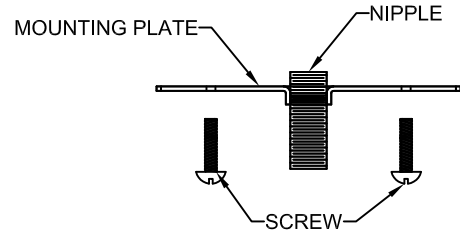

FRAME/COMPONENTS ASSEMBLY

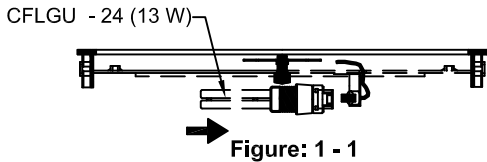


Figure: 1 - 1

STEP 6: Install CFLGU - 24, do not use bulb that exceeds 13 W. see Figure: 1 - 1.

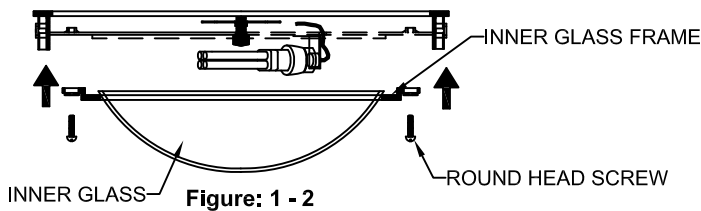


Figure: 1 - 2

STEP 7: Attach inner glass and inner glass frame to center, secure with four (4) round head screws. see Figure: 1 - 2.

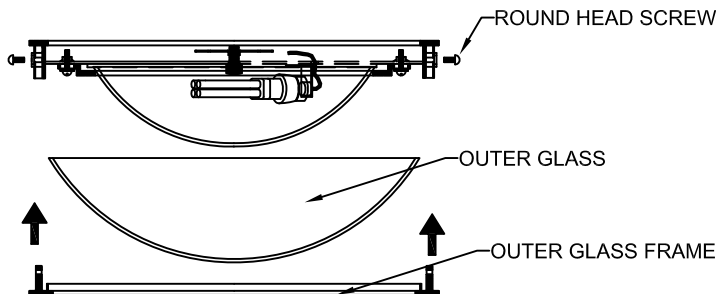


Figure: 1 - 3

STEP 8: Attach outer glass and outer glass frame to center, secure with four (4) round head screws. see Figure: 1 - 3.

LIGHTING MAINTENANCE:

- Regular cleaning of fixture with proper and gentle care using a soft duster, soft lint-free or damp cloth is recommended.
- Refrain from using harsh cleaning liquids that may cause chemical reaction on the hand painted finishes.
- Always refer to the Assembly Instruction before removing any components.
- **HANDLE WITH CARE.**








KALCO.
Handcrafted Since 1980

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 5756

NEWPORT 2LT 23 INCH FLUORESCENT FLUSH MOUNT

PARTS LIST

IMAGE	PARTS NAME	QTY
	Cross Bar	1 PC
	Screw	2 PCs
	Threaded Nipple	2 PCs
	Rs cap	1 PC
	Hex Nut	2 PCs